

## DS-7324/7332HGHI-SH Series HD-TVI DVR



### Features and Functions


- Connectable to TVI and analog cameras;
- Support HIKVISION-C protocol for connecting camera over coax;
- Connectable to network cameras;
- Simultaneous HDMI and VGA outputs at up to 1920×1080p resolution;
- New GUI and supports starting record with one key;
- Redundant recording, holiday recording schedule configuration;
- Instant playback for assigned camera during multi-channel live view mode;
- Support up to 24/32-ch synchronous playback; and reverse playback for multi-channel;
- Smart playback to go through less effective information;
- Manual video quality diagnostics;
- Support VCA alarm (line crossing detection and intrusion detection);
- Customization of tags, searching and playing back by tags;
- Locking and unlocking record files;
- Support HDD quota and group management; different capacity can be assigned to different cameras under quota mode;
- Provide 4 SATA interfaces and 1 eSATA interface for record and backup;
- 1 self-adaptive 10M/100M/1000M network interface;
- Support access by EZVIZ Cloud P2P;
- Support Hikvision DDNS (Dynamic Domain Name System);
- Network detection function.



## Specifications

Model		DS-7324HGHI-SH	DS-7332HGHI-SH	
Video/ Audio input	Video compression	H.264		
	Analog and HD-TVI video input	24-ch	32-ch	
		BNC interface (1.0Vp-p, 75 Ω)		
	Supported camera types	720p/25, 720p/30, 720p/50, 720p/60, 1080p/25, 1080p/30, CVBS		
	IP video input	8-ch (up to 32-ch)	8-ch (up to 32-ch)	
		Up to 2MP resolution		
	Audio compression	G.711u		
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)			
Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)			
Video/ Audio output	HDMI / VGA output	1920 × 1080/60 Hz ,1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
	Encoding resolution	Main stream: 1080p (non-real-time)/720p/WD1/VGA/4CIF/CIF		
		Sub-stream: WD1 (non-real-time)/4CIF (non-real-time)/CIF/QCIF/QVGA		
	Frame rate	Main stream: 1/16 fps to Real time frame rate		
		Sub-stream: 1/16 fps to Real time frame rate		
	Video bitrate	32 Kbps to 6 Mbps		
	Audio output	1-ch, RCA (Linear, 1KΩ)		
	Audio bitrate	64 Kbps		
	Dual-stream	Support		
	Stream type	Video, Video & Audio		
	Synchronous playback	24-ch	32-ch	
Playback resolution				
Network management	Remote connection	128		
	Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface		
	Capacity	Up to 6TB capacity for each disk		
External interface	Network interface	1; 10M/100M/1000M self-adaptive Ethernet interface		
	Serial interface	RS-232, RS-485, Keyboard		
	USB port	3 × USB 2.0		
	Alarm in / out	16/4		
General	Power supply	100 to 240 VAC, 47 to 63 HZ		
	Consumption (without hard disks)	≤ 55W	≤ 65W	
	Working temperature	-10°C to +55°C (14°F to 131°F)		
	Working humidity	10% to 90%		
	Chassis	19-inch rack-mounted 1.5U chassis		
	Dimensions (W × D × H)	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)		
	Weight (without hard disks)	≤ 5 Kg (11.0lb)		

## Physical Interfaces

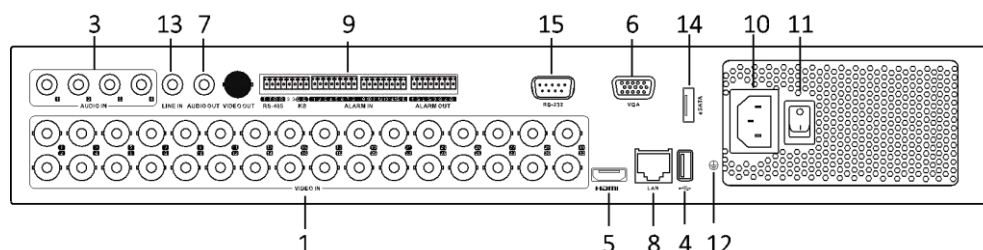

Index	Description	Index	Description
1	VIDEO IN	9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
2	AUDIO IN, RCA Connector	10	100 to 240 VAC Power Input
3	USB Port	11	Power Switch
4	HDMI Interface	12	GND
5	VGA Interface	13	LINE IN
6	VGA AUDIO OUT	14	eSATA Interface
7	LAN Network Interface	15	RS-232 Serial Port
8	VIDEO IN		

## Available Models

DS-7324HGHI-SH, DS-7332HGHI-SH.

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

Hikvision Poland  
T +48-22-460-01-50  
poland@hikvision.com

Hikvision USA  
T +1-909-895-0400  
sales.usa@hikvision.com

Hikvision India  
T +91-22-28469900  
sales@pramahikvision.com

Hikvision UK  
T +44-1628-9021-4  
support.uk@hikvision.com

Hikvision Europe  
T +31-23-5542770  
saleseuro@hikvision.com

Hikvision Italy  
T +39-0438-6902  
info.it@hikvision.com

Hikvision Singapore  
T +65-6684-4718  
sg@hikvision.com

Hikvision Middle East  
T +971-4-8816086  
salesme@hikvision.com

Hikvision France  
T +33(0)1-85-330-444  
info.fr@hikvision.com

Hikvision Oceania  
T +61-2-8599-4233  
salesau@hikvision.com

Hikvision Russia  
T +7-495-669-67-99  
saleru@hikvision.com

Hikvision Spain  
T +34-91-737-16-55  
info.es@hikvision.com

Hikvision Hong Kong  
T +852-2151-1761